


## Power Distribution and Ground Return Solutions

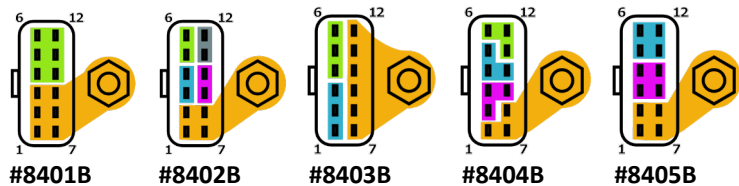

## Sealed Distribution Blocks

**Sealed MX-150 (USCAR) Connector** ensures low amp connections are protected from moisture and corrosion.

**Replaces Unsealed Exposed Interconnection Methods**  
such as barrel butt splices and terminal strips

**1-4 Sets Of Low Amperage Circuits and 3-6 Circuits**  
connected to high amp stainless M6 terminal


**Compact & Flexible Solution** mounts vertically or horizontally to optimize installation

## Replace Exposed Bus Bars and Terminal Blocks with OEM quality sealed connections

## Ground Return Solutions

**RT Series 12 Terminal Ground Block** offers easy ground integration with RT series fuse blocks, can also be used on its own

**CT Series Sealed 12 Position Ground Block** offers ground return protection by containing critical grounds within one sealed, robust and easy to install device. 200 Amp Max Current, M8 I/O Stud




**#2012B**  
**CT Series**



**#8030B**  
**RT Series**



## Wire Harness Solutions

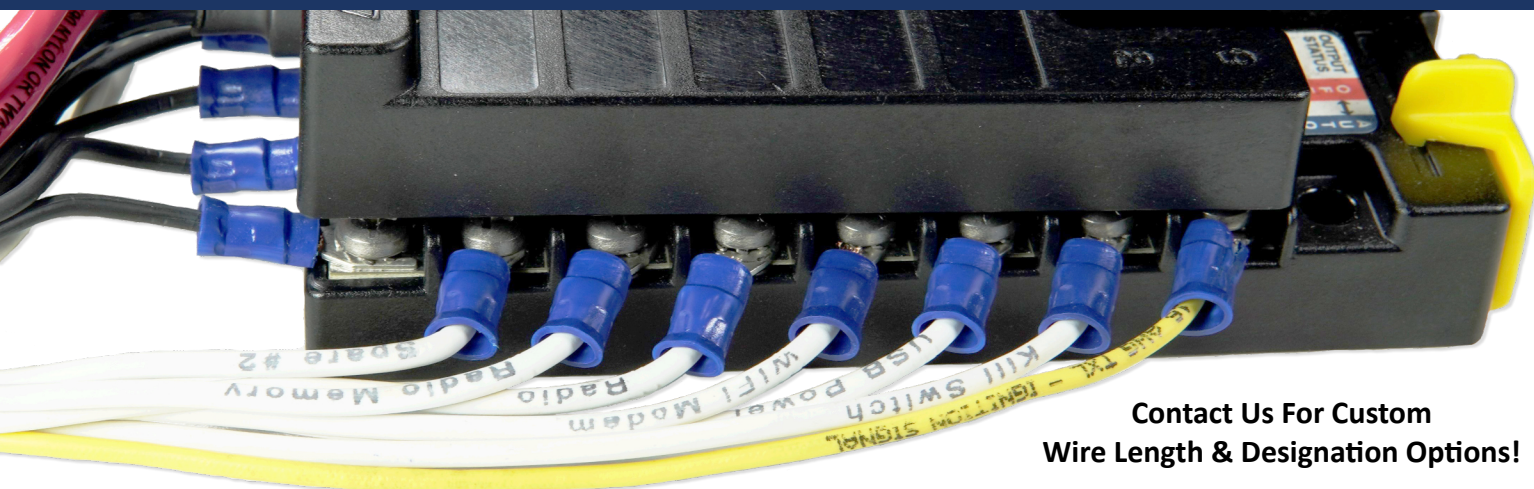

**Contact Us For Custom  
Wire Length & Designation Options!**

## Standard Wire Harness Part Numbers

2613-20	PDM + Harness - 13 Output x 20 ft W/Kill Switch
2713-20	PDM + Harness - 13 Output x 20 ft
2626-20	PDM + Harness - 26 Output x 20 ft W/Kill Switch
2726-20	PDM + Harness - 26 Output x 20 ft



**Egis Mobile Electric**  
**3135 Mercer Ave, Suite 102**  
**Bellingham, WA 98225**  
**+1.360.768.1211**  
***sales@egismobile.com***




# Product Guide

[www.egismobile.com](http://www.egismobile.com)



Advanced Power Distribution Modules

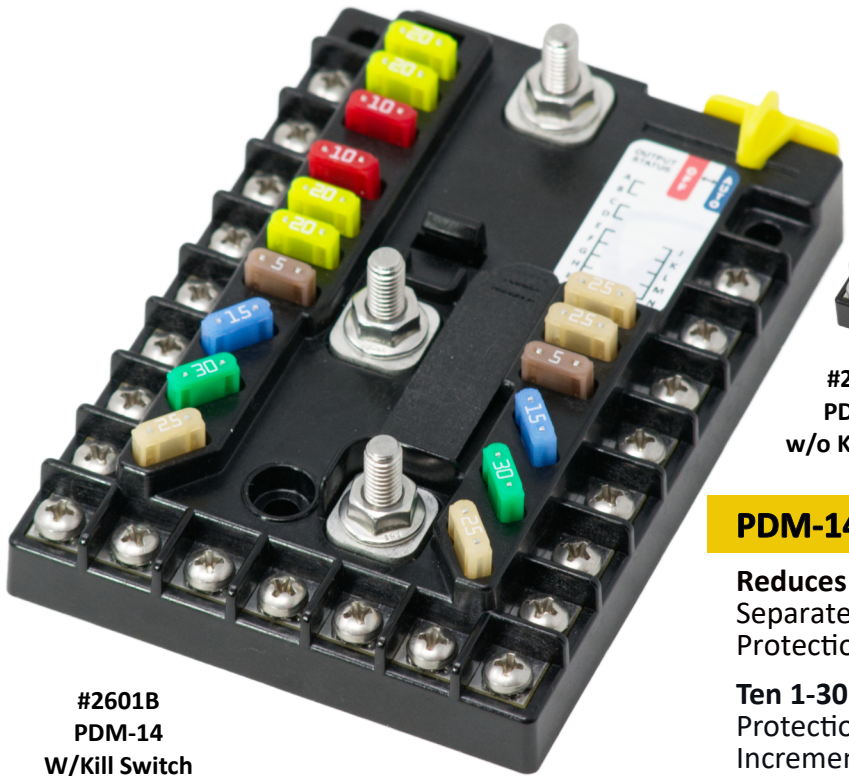

#2601B  
PDM-14  
W/Kill Switch



#2602B  
PDM-14  
w/o Kill Switch

Cover  
Included

PDM-14 With and Without Kill Switch

**Reduces Space Used and Total Installed Cost:** Up to Four (4) Separate Functions in One Product. Power Switching, Circuit Protection, Ground Return Collection, Kill Switch

**Ten 1-30 A Outputs Plus Three Flex 1-45 A Outputs** Allow Protection of All Low Ampere and Medium Ampere Incremental Circuits Within One Complete Solution

**Three Configurable Output Groups** Can Be Set to 24/7, Ignition Switched, or Time Delayed Off (15 Min to 10 Hr)

**Expandable** Up to 26 Fused Outputs

Battery Management And Protection

Time Delay Relays

Voltage or External Input / Ignition Based Load Shedding, Fully Sealed, Programmable, Compact

30A, 160A, or 200A. 12V or 24V Single and Dual Output Options



#5601B  
30A TDR



#7610B  
Single Output  
ACR

#7612B  
Dual Output  
ACR

#7614B  
Dual Battery  
Charge Manager



#6001-3001  
200A TDR

Advanced Automatic Charge Relays


**Fully Adjustable** Open and Close Voltage Settings Maximize Flexibility

**Supports Multiple Engines** Via Start/Engine Isolation, Start Assist Feature

**Up to 160 Amp** Capability Supports High Output Alternators

**Unique Triple Battery** Model Reduces Install Space and Cost

Circuit Protection

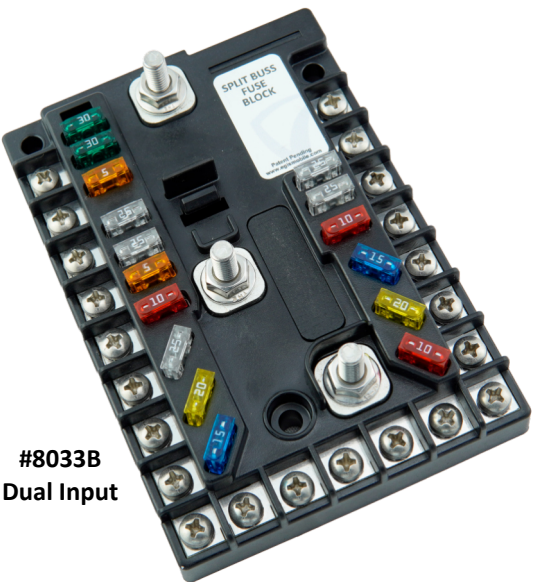

#8033B  
Dual Input



#4709-250

#4706-080

Fuse Blocks

**Single or Dual Input Mini/ATM Fuse Blocks** Offer 3 High Amp Capable Outputs (1-50A) & 10 Low Amp Outputs (1-30A), Plus Ground Return

**CT Series Fuse Block** Utilizes MX-150 Connections for Eight (8) ATO/ATC Fuse Outputs (1-25A) Plus Two (2) LP J Case Fuse Outputs (20-60A)

**RT Series of Fuse Blocks** Provide 6 - 18 Output Modular Expandable Design, Blown Fuse LED Indication, And Optional Ground Return Block



#5015B  
CT Series



RT Series

Circuit Breakers - Surface / Panel Mount

Sealed Against Dust & Water

Designed for Electrical / Manual Switching Endurance

25 - 250 Amp Continuous Current Rating Options

Power Switching ~ Relays/Solenoids/Contactors



#7422B  
Advanced  
2X80A Relay

#7421B  
Advanced  
160A Relay



#90187  
180A Relay



#901488  
75A Relay

Remote Relay Switches

75A - 160A, Single/Dual Output, 12V/24V

Deutsch DT/AT and Amp SuperSeal Connector Options

Ultra Low Off-State Power Draw

High Voltage Solenoids / Contactors

**Two Current Rating Sizes:** 100 Amp & 250/400 Amp

**Support 12 or 24 V** Control Voltage Applications

**Hermetically Sealed** and High Switching Cycle Rating

**Optional Auxiliary Contacts** For Remote Status Indication



#7022B  
250/400A

#7024B  
100A